

16

1636 03


Power supply connectors



Power supply plug acc. to JEITA RC-5320A JSAP3, straight version, with solder eyes and bend protection

16

1636 03

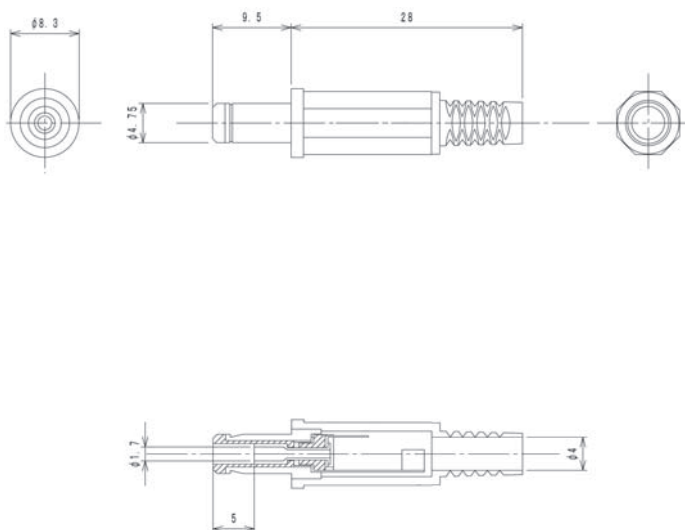

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	PC
Contact	CuZn, nickel-plated
Insulation	POM
Housing	PP

Mechanical data

Outer diameter	4.75 mm
Inner diameter	1.7 mm

Connectable conductors for solder area

Cable diameter	4 mm
----------------	------

Electrical data (at T_{amb} 20 °C)

Rated current	2 A
Rated voltage	10.5 V DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts
↗ 1613 07

16

1636 03

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1636 03	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag